

150 LCS-HW

- ◆ Standard[⊕] sensitive thermal PP film
- ◆ Premium-top thermal film.
- ◆ Standard resolution grade 300 DPI
- ◆ For print speed up to 250 mm/s (10 IPS)

FILM PROPERTIES

Item	Unit	Specification			Test method
		Target	Min	Max	
Basis weight	g/m ²	84	76	92	ISO 536 (JIS P-8124)
Thickness	μm	104	95	113	ISO 534 (JIS P-8118)
Stiffness (Clark)	MD	mNm	40	30	TAPPI T451 (JIS P-8143)
	CD	mNm	60	50	
Smoothness	Face	s	1500		ISO 5627 (JIS P8119)
D65 Brightness	Face	%	85		ISO 2470-2



CERTIFICATIONS / REGULATIONS / DIRECTIVES

- RoHS
- WEEE
- 2003/11/EC
- 2000/53/EC
- 76/769/EEC
- ISO EN71-3
- REACH
- Indirect food contact
- BPA free

ISEGA




SENSITIVITY PROFILE

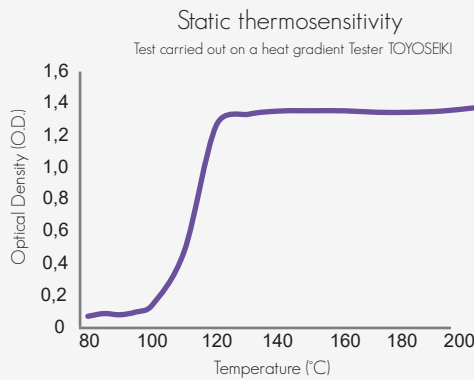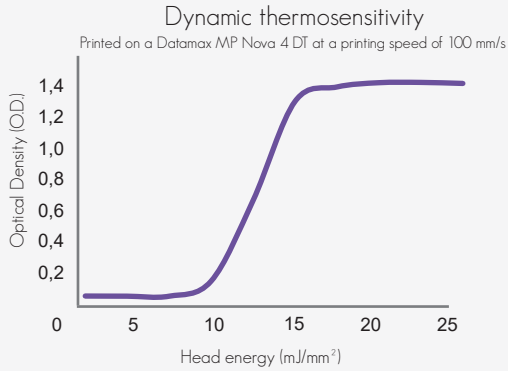


PRINTING PROPERTIES

Item	Unit	Specification		Test method
		Min	Max	
Color			Black	Visual inspection
Dynamic density	O.D.		1,30	RIF IP0153 / IP0151
Background density	O.D.		0,12	RIF IP0101
Distance without abrasion	km		50	DPS-4600 Head matching test
Image density	O.D.		1,30	Datamax-4038 Head matching test
	ANSI grade		B	

INKING PROPERTIES

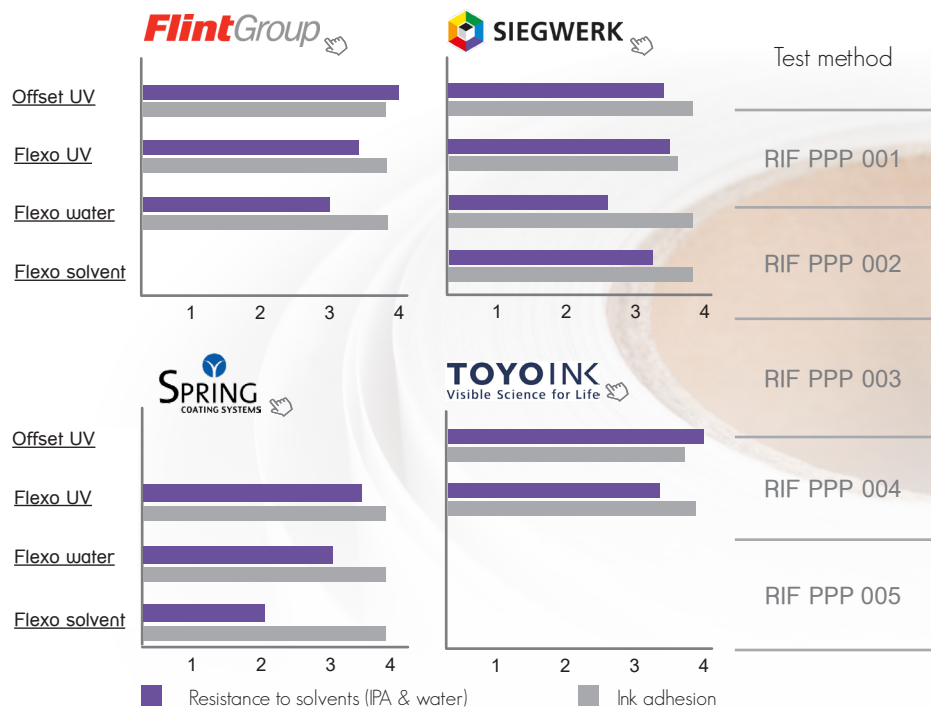

PRESERVATION PROPERTIES

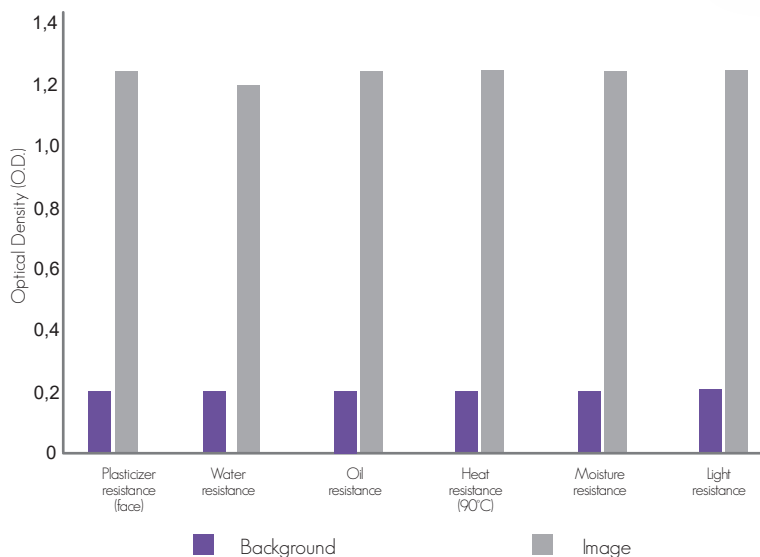

Item	Test method
Plasticizer resistance (face)	RIF PP0111
Water resistance	RIF PP0115
Oil resistance	RIF PP0101
Heat resistance (90°C)	RIF PP0114
Moisture resistance	RIF PP0112
Light resistance	RIF PP0113