

# B110CX

PREMIUM

Resin • Flat-Head

- High heat resistance up to 220°C.
- Excellent chemical, solvent and scratch resistance.
- Applicable to a wide range of synthetic materials: PET/PP/PE/PVC films..
- Ricoh's unique coating on the back allows reliable and superior matching qualities with the thermal head.

## RIBBON PROPERTIES

- Total ribbon thickness: < 9µm
- Polyester film thickness: 4,5µm
- Friction coefficient:< 0,045
- Ink melting point: 83°C
- Tearing resistance: > 200N/mm<sup>2</sup>
- Transmission density: 0,65 mini



Automotive



Electronics



Heat resistant

## CERTIFICATIONS / DIRECTIVES

- TSCA (Toxic Substances Control Act)
- RoHS
- WEEE
- 2003/11/EC
- 2000/53/EC
- 76/769/EEC
- ISO EN71-3
- REACH



For any other request, please feel free to contact [sales.ttr@ricoh-industrie.fr](mailto:sales.ttr@ricoh-industrie.fr)

# GENERAL CONDITIONS

Usage conditions: 5 to 35°C at 30 to 85% of relative humidity.

Storage life: 24 months after slitting day.

Storage conditions: Keep indoor avoiding high temperature (such as beside a heat source), high humidity, direct sun light.

**RICOH**  
imagine. change.

## PRINTING PROPERTIES

Maximum printing speed 8 IPS

	Non coated paper	Coated paper	PET	PP	PE	PVC
Compatibility	X	X	✓	✓	✓	✓
Image density	-	-	1,85	2,08	2,00	1,57

Note: Smoothness Bekk for paper family must be over 2000s.

Image resolution for paper & film:

Minimum size:

- For the lines: 0.1mm


- For the caracters: 1.0mm

## PRINTED IMAGE DURABILITY

TESTS	RESULTS	B110CX with standard matt white polyester
Smear + heat 100°C Smear with carboard (weight 1kg - 50 back & forwards)	ANSI A	Engine oil
Heat (220°C) Heat gradient 3,6kgF/cm <sup>2</sup>	No ink on the cotton fabric	Brake fluid 10 Windshieldwasher Diesel
Scratch 50 back and forwards with a rub tester	ANSI A	Unleaded petrol 160
Light Xenon lamp at 650W/m <sup>2</sup>	ANSI A	IPA 120 Ethanol 40
Water 24 hours in water	ANSI A	Back & forwards until a beginning of erase

- August 2017

## B110CX DURABILITY

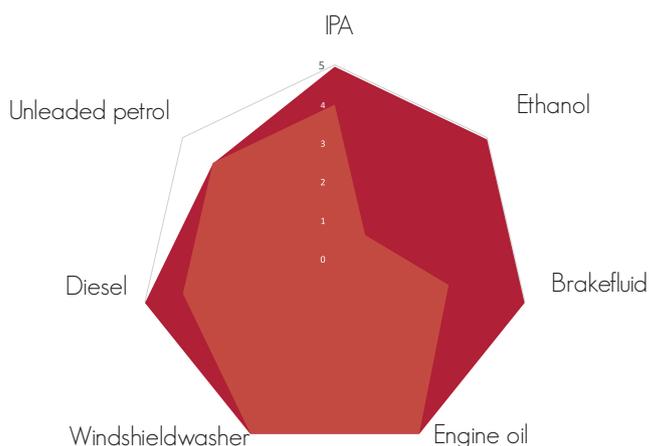

5 : no damage  
0 : erased

B110CX with standard white polyester  
 B110CX with specific\* polyester